


FUTURO IP

FIP-D-2wire-Distributor 2-Wire Video/Audio Distributor

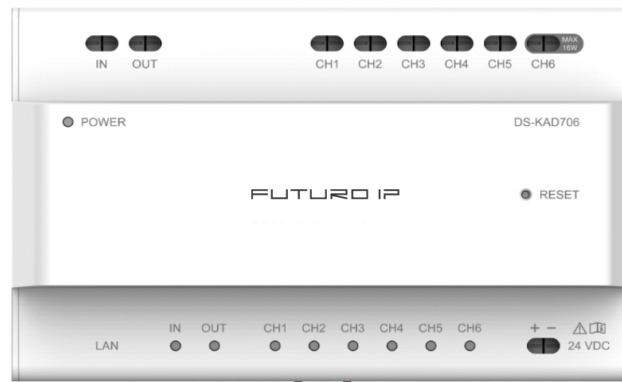


Key Feature

- 6 two-wire cascade interfaces, including 1 interface (max. 16 W) used for connecting door station
- 2 cascade interfaces used for cascading DS-KAD706 and DS-KAD706-S
- 8 interface indicators used for displaying network status of interfaces

Specifications


Model		FIP-D-2Wire-Distributor
Interface	Network interface	1, RJ45 (1-ch reserved terminal and 1-ch for WAN access)
	2-Wire interface	6-ch for device power supply, including 1-ch for door station power supply with max. output power 16 W
	Reset	1
	Signal indicator	8 signal indicators for indicating 6-ch input and output signal
	Power indicator	1
General	Power supply	24 VDC
	Power consumption	< 9 W
	Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
	Working humidity	10% to 90%

Typical Application

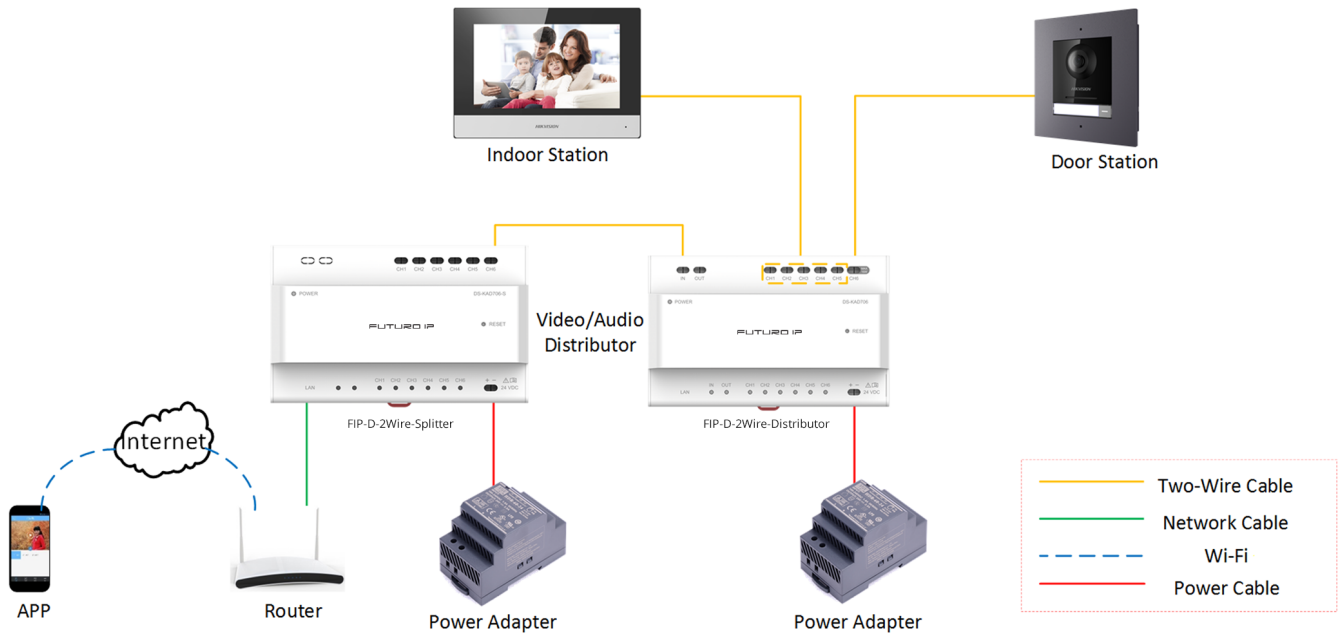

Available Model

FIP-D-2wire-Distributor

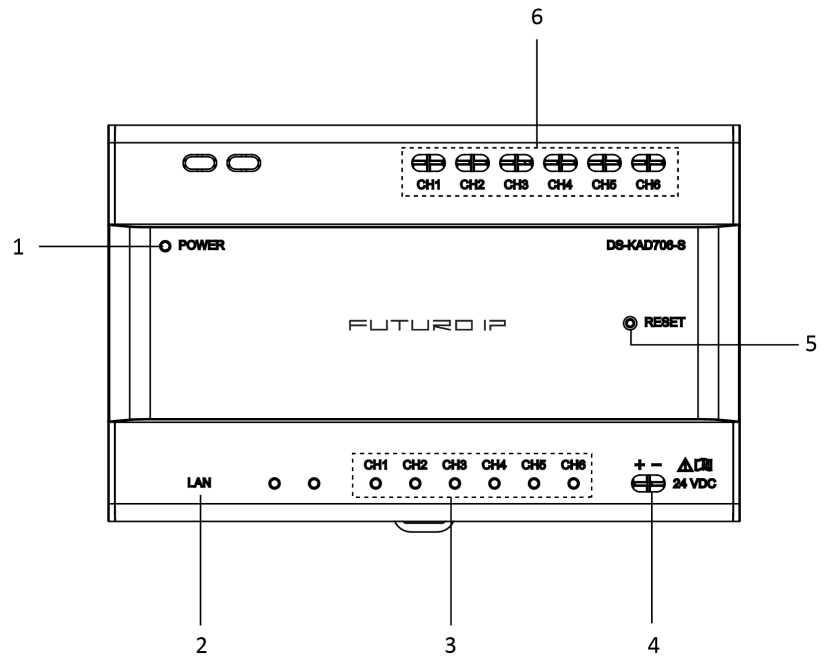

Physical Interface

No.	Description
1	Power Indicator
2	Network Interface
3	Network Indicator
4	Power Input
5	Reset Button
6	Interface