



RAPID
LED

HERO-2

HIGH POWER COMMERCIAL LED FLOODLIGHT

INSTALLATION INSTRUCTIONS

These instructions should be read carefully and kept for future reference



TECHNICAL DATA

MODEL #	IK RATING	CCT	WATTAGE	IP RATING	DIMENSIONS (mm)
R3077-400	IK08	5000K	400w	IP66	365 (H) x 336 (W) x 311 (D)
R3077-600	IK08	5000K	600w	IP66	500 (H) x 365 (W) x 311 (D)

Class I construction
220-240V / 50-60Hz

INSTALLATION & WARNINGS

Read installation instructions carefully before installing.

This product may contain substances that can be hazardous to the environment if not disposed of properly.

Electrical and electronic equipment should never be disposed of with general household waste but must be separated for its correct treatment and recovery. Where possible recycle your packaging.

It is recommended that luminaires are installed / maintained by a fully qualified electrician and wired in accordance to the latest IEC standards or national equivalent.

Mains power must be switched off during any installation or maintenance.

Make sure the wires have been properly connected before powering on the device.

Non-user replaceable light source - when light sources reaches it's end of life, module must be replaced. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

To avoid damage, falling, electric shock or fire, please do not modify the lamp or replace accessories without confirming with the supplier first.

Do not dismantle the lamp without the supplier's authorization.

Do not touch the power supply when the lamp is operating.

If the external flexible cable or cord of the luminaire is damaged, it should only be replaced by the supplier, a service agent or qualified person.

Terminal block not included. The electrical fitting must be installed by a licensed electrician.

Only to be installed outside arms reach.

For use in environments where an accumulation of non-conductive dust on the luminaire may be expected.

Mounting heights of lights should not be higher than 20m.

WARRANTY

- This Rapid LED product is covered by a 5 Year warranty (2 Year replacement & labour / 3 Years replacement only)
- Proof of purchase must be provided with all warranty claims
- All Rapid LED products must be installed by a licenced Electrical Contractor
- All Rapid LED products come with a warranty that cannot be excluded under the Australian Consumer Law
- Please contact Rapid LED on sales@rapidled.com.au for all warranty claims

Version 04.2025

www.rapidled.com.au



sales@rapidled.com.au



Supplied by INFRONT TECHNOLOGIES

Phone 1300 736 970

sales@infronttech.com.au · infronttech.com.au


For more information call or email — Australia-wide sales, technical support and warranty service.

TECHNICAL PARAMETERS


PRODUCT CODE / WATTAGE	R3077- 400	R3077-600	
INPUT CURRENT	1.80A	2.70A	
IN-RUSH CURRENT	100A MAX @ 200µs	110A MAX @ 200µs	
POWER FACTOR (at full load)	>0.95		
DRIVER TYPE	Constant Current (CC)		
SURGE PROTECTION	10KV L-N, 10KV L/N-E		
CONTROL	ON/OFF		
INPUT VOLTAGE (V)	100-240VAC ~ 50/60Hz		
WORKING TEMPERATURE	-30°C to 50°C		
BEAM ANGLE	FI4502 / FI4503 / FI4504 / FI4505 / FI4506		
IK RATING	IK08		
IP RATING	IP66		

DIMENSIONS


R3077-400

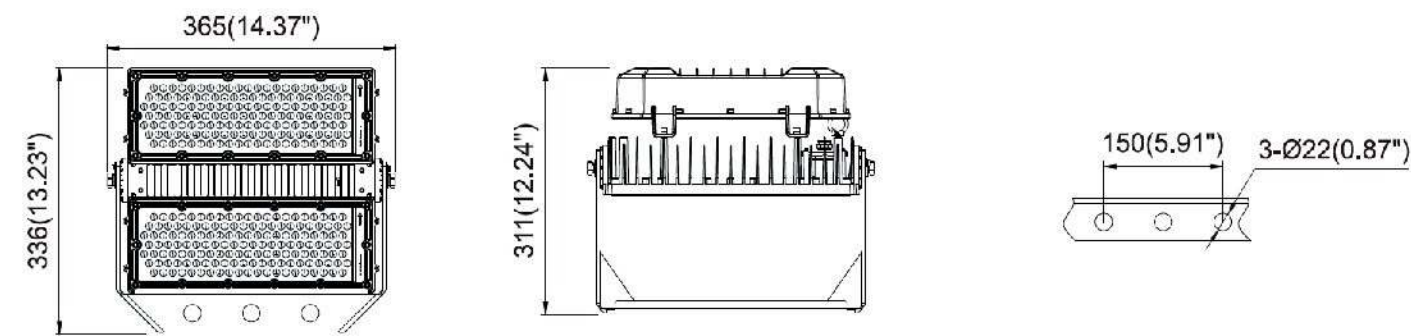

R3077-600

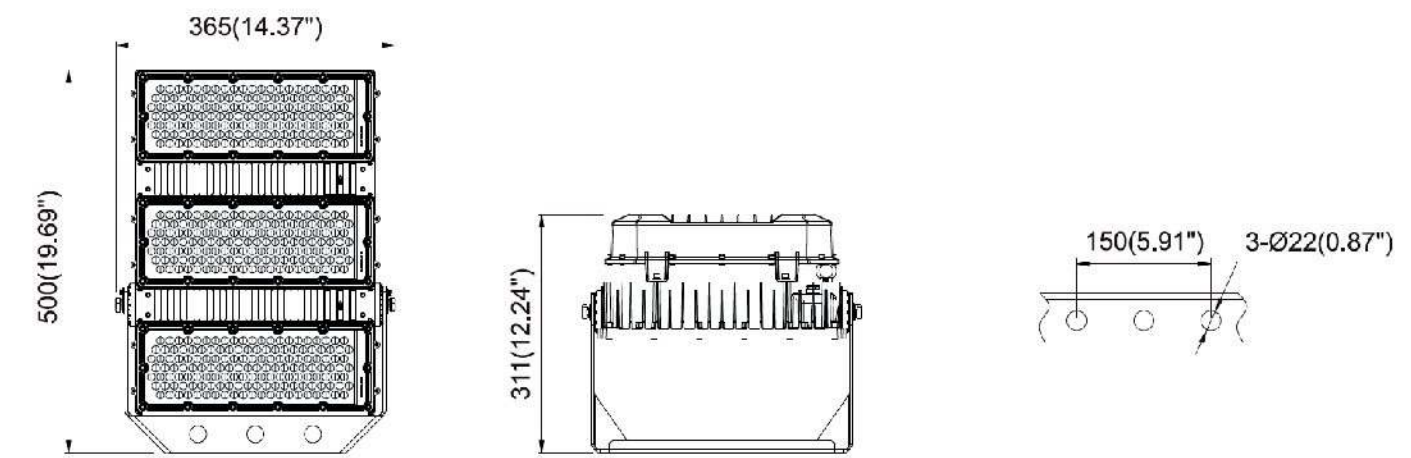


INSTALLATION INSTRUCTIONS

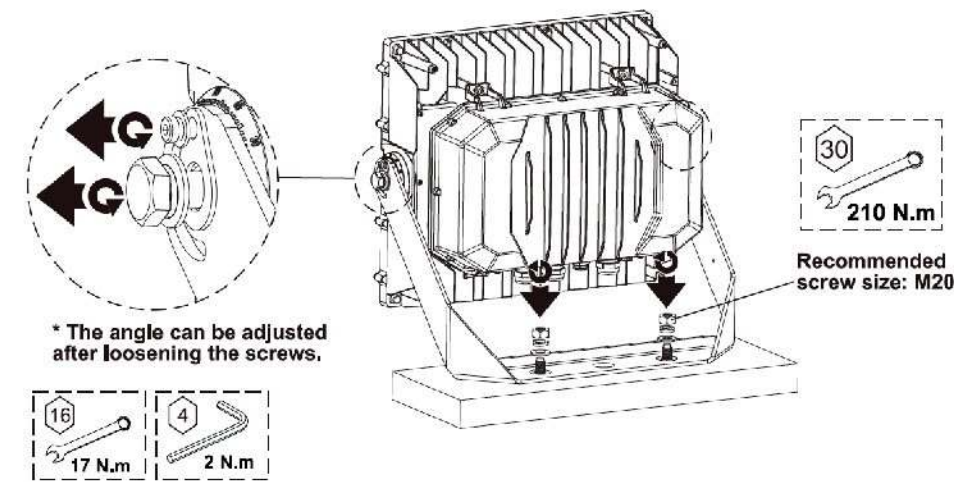


ROTATABLE ANGLE

R3077-400


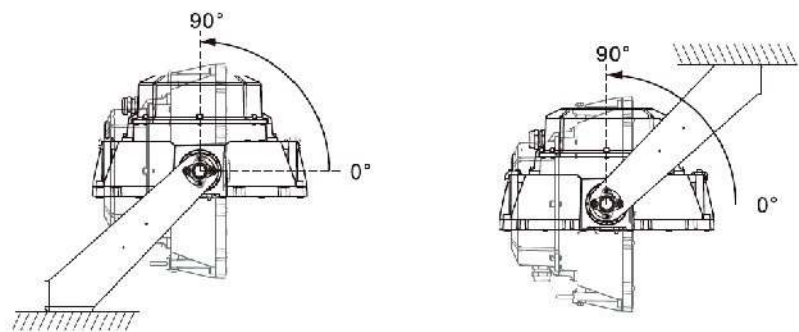


R3077-600



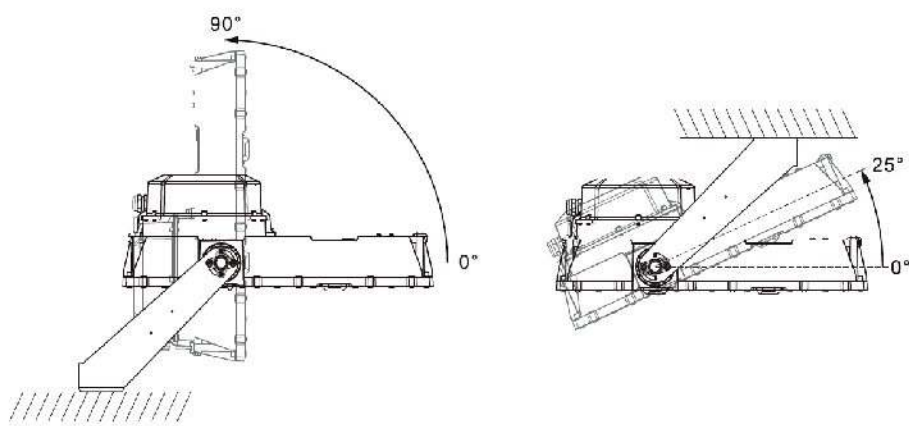


WIRING

NON-DIMMABLE

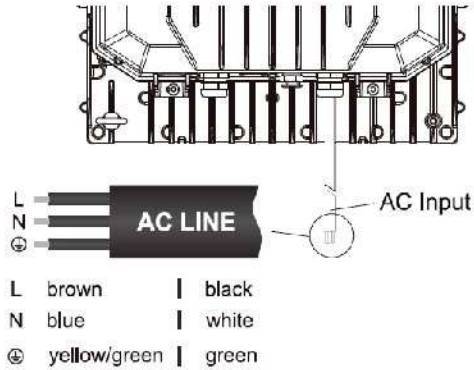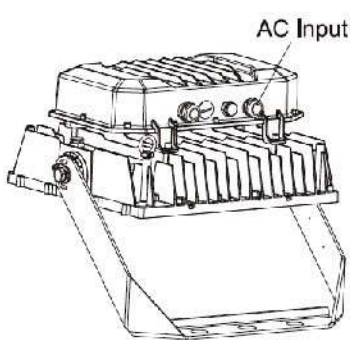

SAFETY ROPE INSTALLATION

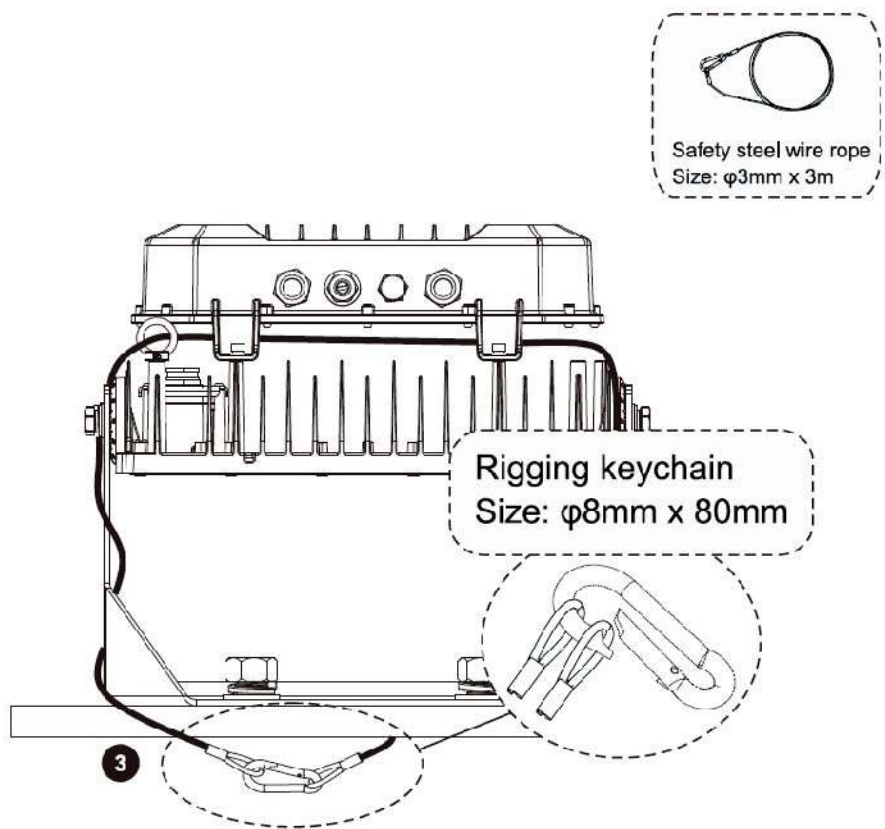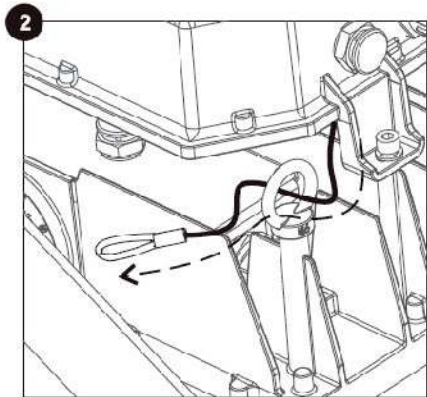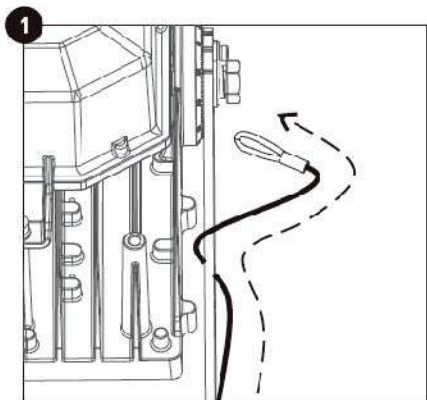

www.rapidled.com.au



sales@rapidled.com.au