


FUTURO IP

FIP-M-8WiFi-2Wire-White

7" Touch-Screen 2-Wire IP Indoor Station

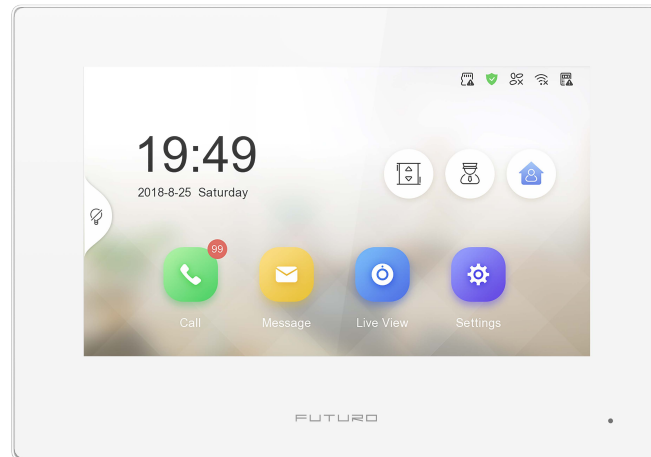

Key Feature


- Two-pin wire for power supply and network access
- UI V2.0: User friendly design
- 7-inch colourful touch screen with resolution 1024 × 600
- 2-ch transmission plan
- Stores messages and captured pictures in the TF card
- Remote unlocking via the client software or the mobile client
- Views LIVE videos of door stations and linked cameras
- Supports wireless network

Specification

Model		FIP-M-8WiFi-2Wire-White
System	Processor basic frequency	1 G
	Memory	128 MB
	Flash	16 MB (32 MB hardware compatibility)
	Operation system	Embedded Linux operation system
Display	Display screen	7-inch TFT LCD
	Display resolution	1024 × 600
	Operation method	Capacitive touch
Audio	Audio Input	Build-in omnidirectional microphone
	Audio output	Built-in loudspeaker
	Volume	Local or software control

Model		FIP-M-8WiFi-2Wire-White
	Audio compression standard	G.711 U
	Audio compression rate	64 Kbps
	Audio quality	Noise suppression and echo cancellation
Network	Wired network	BroadR-Reach
	Wireless network	Wi-Fi 802.11b/g/n
	Protocol	TCP/IP, SIP, RTSP
Interface	Network interface	Two-wire interface
	RS-485	1
	Alarm input	8 zones alarm input
	Relay output	2
	TF card	Support, Max. 32 GB
	Power interface	Two-wire interface
Extended Application	Mobile client	Support
	Indoor call elevator	Support
	IPC	Support
General	Power supply mode	Two-wire
	Power consumption	≤ 6 W
	Working temperature	-10 °C to 50 °C (-14 °F to 122 °F)
	Working humidity	0% to 90%
	Dimensions (W × H × D)	200 mm × 140 mm × 15.1 mm (7.87" × 5.51" × 0.59")


Typical Application

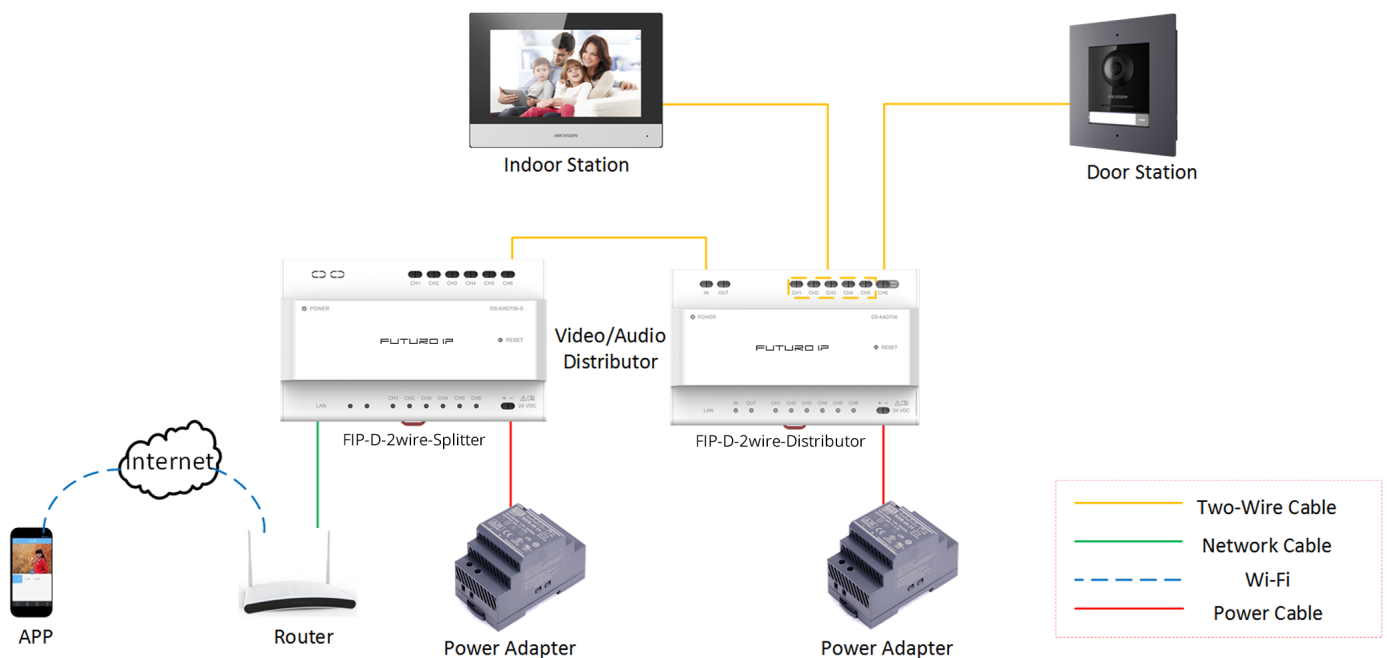

Available Model

FIP-M-8WiFi-2Wire-White

Physical Interface

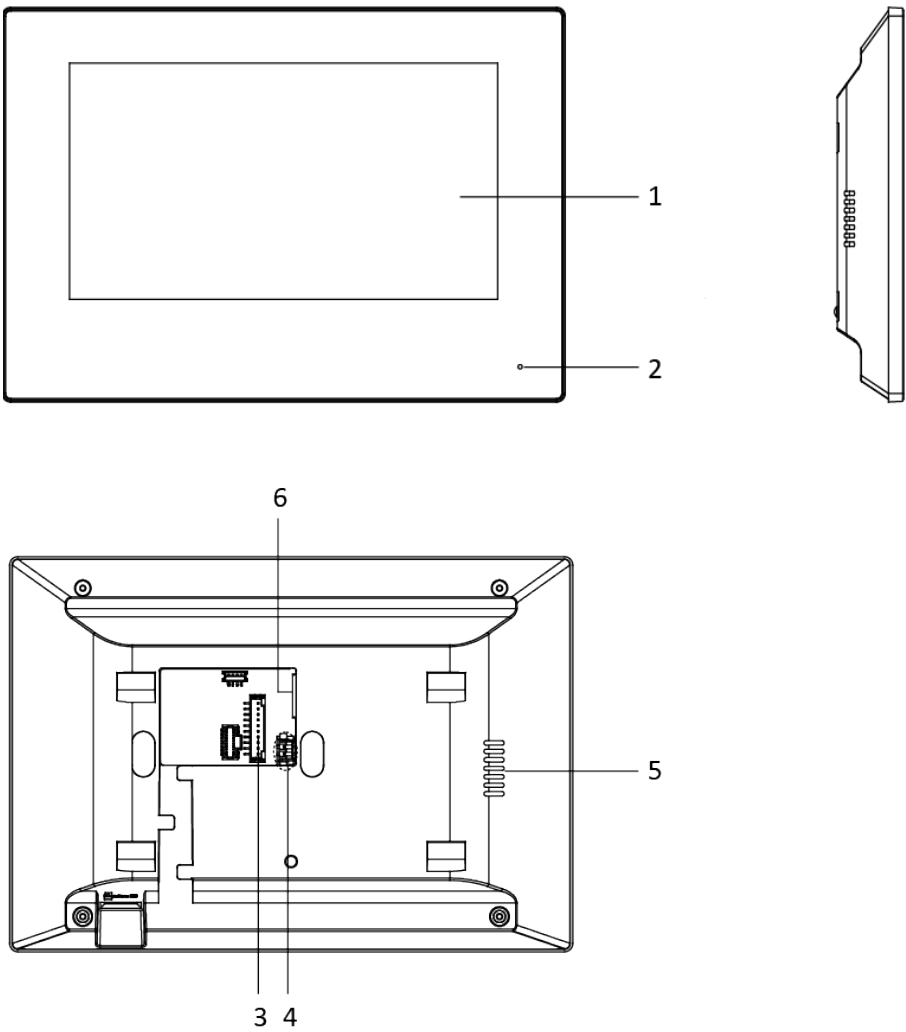

No.	Description
1	Display Screen
2	Microphone
3	Alarm Terminal
4	Power Interface
5	Loudspeaker
6	Network Interface and Power Supply