

# FIP-M-8WiFi-2Wire-Black 7" Touch-Screen 2-Wire IP Indoor Station



#### **Key Feature**

- Two-pin wire for power supply and network access
- UI V2.0: User friendly design
- 7-inch colourful touch screen with resolution  $1024 \times 600$
- 2-ch transmission plan
- Stores messages and captured pictures in the TF card
- Remote unlocking via the client so tware or the mobile client
- Views live videos of door stations and linked cameras
- Supports wireless network


#### **Specification**

Model		FIP-M-8WiFi-2Wire-Black
System	Processor basic frequency	1 G
	Memory	128 MB
	Flash	16 MB (32 MB hardware compatibility)
	Operation system	Embedded Linux operation system
Display	Display screen	7-inch TFT LCD
	Display resolution	1024 × 600
	Operation method	Capacitive touch
Audio	Audio Input	Build-in omnidirectional microphone
	Audio output	Built-in loudspeaker
	Volume	Local or software control



Model		FIP-M-8WiFi-2Wire-Black
	Audio compression standard	G.711 U
	Audio compression rate	64 Kbps
	Audio quality	Noise suppression and echo cancellation
	Wired network	BroadR-Reach
Network	Wireless network	Wi-Fi 802.11b/g/n
	Protocol	TCP/IP, SIP, RTSP
	Network interface	Two-wire interface
	RS-485	1
Interface	Alarm input	8 zones alarm input
interface	Relay output	2
	TF card	Support, Max. 32 GB
	Power interface	Two-wire interface
	Mobile client	Support
Extended Application	Indoor call elevator	Support
	IPC	Support
	Power supply mode	Two-wire
	Power consumption	≤ 6 W
General	Working temperature	-10 °C to 50 °C (-14 °F to 122 °F)
	Working humdity	0% to 90%
	Dimensions (W × H × D)	200 mm × 140 mm × 15.1 mm (7.87" × 5.51" × 0.59")

### **Typical Application**

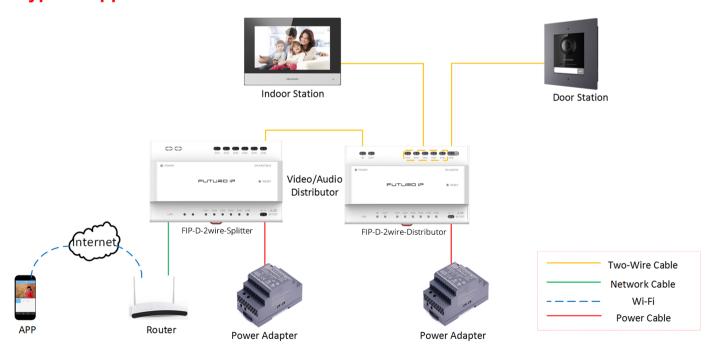






#### **Available Model**

## FIP-M-8WiFi-2Wire-Black

## **Physical Interface**

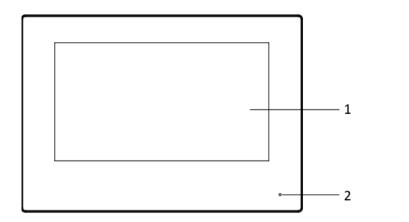



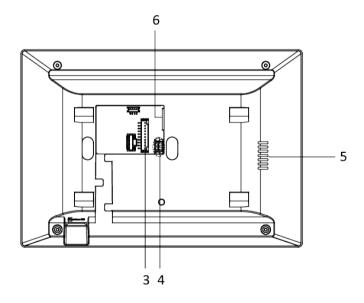

No.	Description
1	Display Screen
2	Microphone
3	Alarm Terminal
4	Power Interface
5	Loudspeaker
6	Network Interface and Power Supply