

**DS-KV6113-WPE1(C)**  
**Video Intercom Villa Door Station**

The KV6 series IP villa door station, with small and simple design, supports one-touch button to call the resident's indoor station. Users can view, chat with, and send permission for the visitor via mobile phone in anywhere. The villa door station is powered by the standard PoE, and is no need to wire extra power supply, which is easy for installation and deployment, and is suitable for villa, detached house, etc.

- 2 MP camera with IR supplement
- One-touch button calling design for easier calls
- Built-in card reader module
- Standard PoE power supply
- IP65 protection level
- Convenient Hik-Connect APP Mobile Control

[www.hikvision.com](http://www.hikvision.com)


## ▪ Specification

System parameters	
Operation system	Linux
ROM	32 MB
RAM	256 MB
Processor	Embedded high performance processor
Display parameters	
Screen size	/
Operation method	/
Type	/
Resolution	/
Video parameters	
Lens	1
Resolution	Main stream: 1920 × 1080p, 720p Sub stream: 640 × 480p
FOV	Horizontal: 131° Vertical: 78°
Wide dynamic range (WDR)	Support 120 dB
Supplement light	IR light, up to 3 m
Video compression standard	H.264; h.265; MJPEG
Audio parameters	
Audio input	1 built-in omnidirectional microphone
Audio compression standard	G.711 U、 G.711 A、 Opus、 AAC-LD、 AAC-LC、 G.726、 G.722.1
Audio output	1 built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
User capacity	2000
Face capacity	/
Card capacity	10000
Network parameters	
Network protocol	TCP/IP, RTSP, ipv6、 onvif
Wi-Fi	IEEE802.11b, IEEE802.11g, IEEE802.11n
Bluetooth	Not supported.
3G/4G	/
Device interfaces	
Alarm input	4
Network interface	1 RJ-45, 10/100 Mbps self-adaptive
TAMPER	1
Exit button	1
RS-485	1
USB	/
Wiegand	/
TF card	Reserved
Alarm output	/

Lock control	1 relay, Max. 30 VDC 2 A
Door contact input	1
<b>General</b>	
Button	1 physical button
Installation	Surface mounting
Indicator	2
Weight	Net weight: 0.190 kg Gross weight: 0.414 kg
Protective level	IP65
Working temperature	-40 °C to 55 °C(-40 °F to 131 °F)
Working humidity	10% to 95% (no-condensing)
Dimension (W × H × D)	138 mm × 65 mm × 27 mm (5.4" × 2.6" × 1.1")
Battery	/
Application environment	Outdoor
Power consumption	< 10 W
Power supply	
Language	English, Arabic, European French, Russian, European Spanish, Latin American Spanish, Italian, German, Polish, Turkish, Portuguese, Brazilian Portuguese, Uzbek, Kazakh, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Lithuanian, Estonian, Latvian, Norwegian, Danish, Slovenian, Slovak, Hebrew, Swedish, Finnish, Mongolian, Vietnamese, Traditional Chinese(Taiwan), Latin American Spanish

## • Physical Interface


No.	Description	No.	Description
1	Microphone	7	Terminals
2	Camera	8	Debugging Port
3	Indicator	9	TAMPER
4	Button	10	Set Screw
5	Card Reading Area	11	TF Card Slot (Reserved)
6	Loudspeaker	12	Network Interface

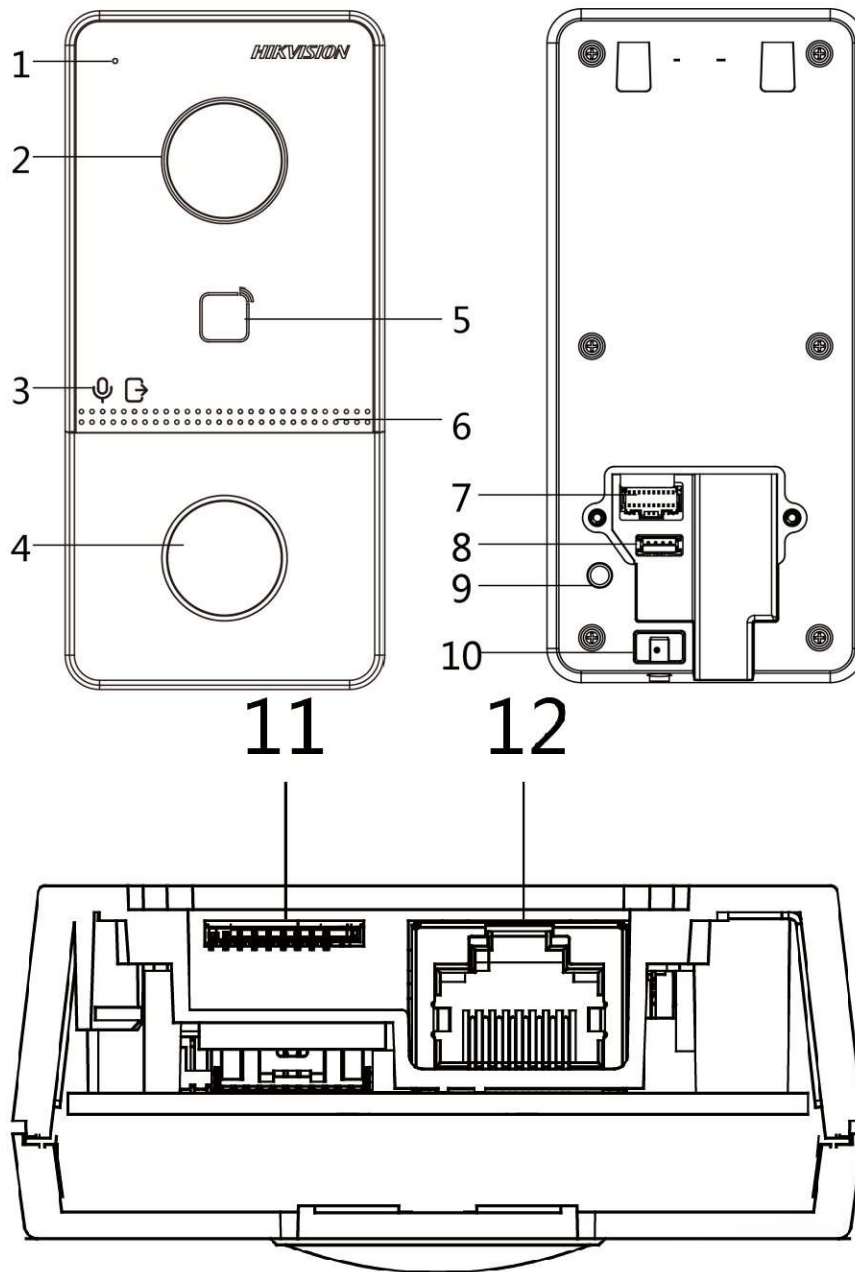

▪ **Available Model**

DS-KV6113-WPE1(C)

▪ **Dimension**

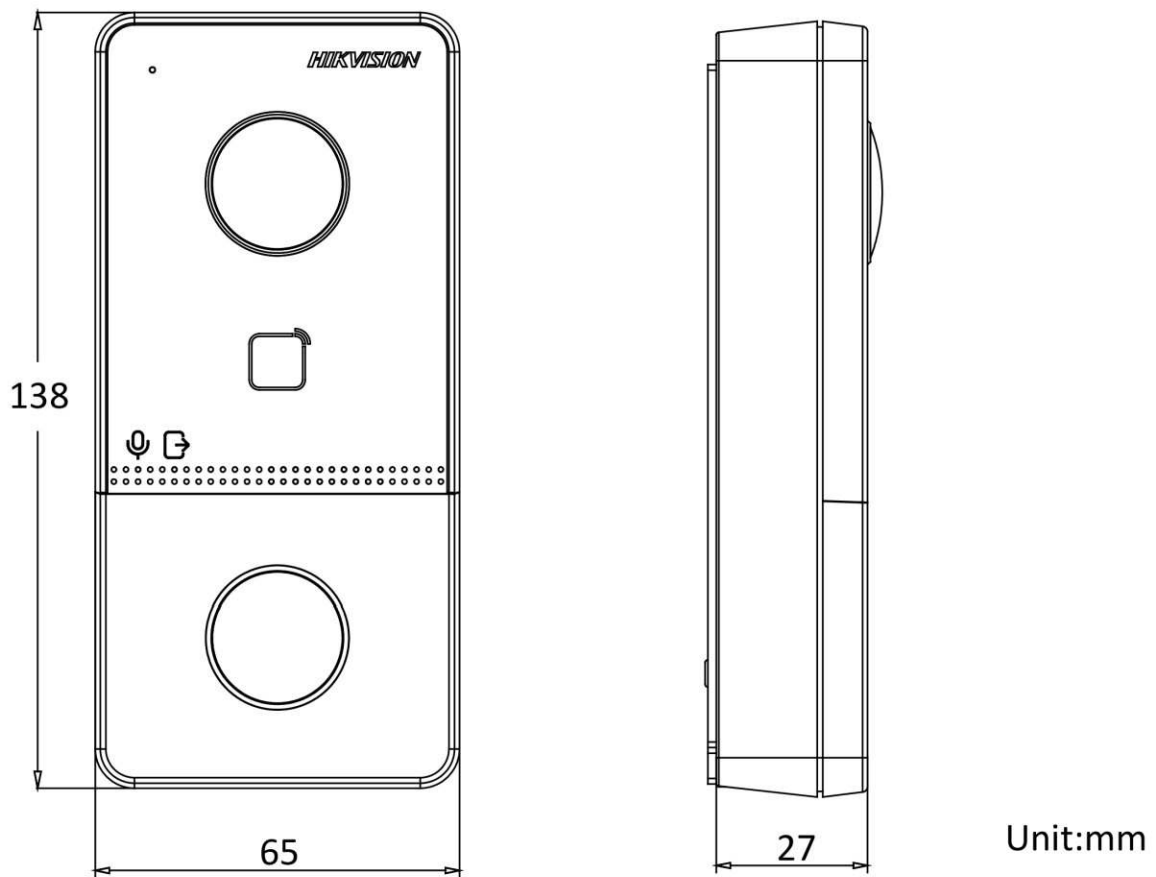

- Accessory
- Optional

DS-KAW50-1	DS-KABV6113-RS	DS-KAW50-1N	DS-KABV6113-A
			

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

**HIKVISION®**



**Supplied by INFRONT TECHNOLOGY**

**Phone 1300 736 970**

[sales@infronttech.com.au](mailto:sales@infronttech.com.au) · [infronttech.com.au](http://infronttech.com.au)

*For more information call or email — Australia-wide sales, technical support and warranty service.*