

24 Inch LCD Monitor Display Unit

MT-24-V



Features

- True color display and perfect color reproduction.
- Wide viewing angle: 178° (H) / 178° (V) .
- No color shift from any view angle.
- Specific menu design, which is simple to operate.
- Support 7*24 working and lower power consumption.
- Adaptively recognize signal.
- VESA stand bracket.
- Support multiply language.
- Support speaker
- High fidelity digital processing for a brilliant and vivid video.
- Professional thermal design to extend equipment lifespan.


- Screen can reduce blue light, protect eyes.
- Without ripple, use smooth dimming with DC to eliminate screen flicker.
- Three sides super slim design, min width can be 2.8mm.
- High light transmittance, uniform brightness, rich color, wide color gamut.

Specifications


Panel	Description
Backlight	LED
Panel Size	24"
Pixel Pitch (H x V) (mm)	0.2745 x 0.2745
Resolution	1920 x 1080
Color Support	16.7 M
Brightness (cd/m²)	250
Contrast Ratio	3000:1
Refresh Rate	60 Hz
Response Time (ms)	7
Viewing Angle (H/V)	Horizontal 178° , Vertical 178°
Operation Hour	24/7
Signals	Description
Input	1 x VGA, 1 x HDMI, 1 x Audio IN
Output	2*Speaker, 1.5W
VESA	Description
VESA (mm)	100 x 100
OSD	Description
Multi-Language	8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese)
General	Description
Input Voltage	DC 12 V, 2 A
Typical Power Consumption (W)	≤24 (On)
Standby Power Consumption (W)	≤0.5 (Standby)
Product Dimensions (W x H x D) (mm)	541.8 x 412.6 x 200.0 (With Pedestal)
Package Dimensions (W x H x D) (mm)	606 x 405 x 125
Weight (Kg)	Net Weight: 3.3 Gross Weight: 4.1
Operating Temperature	0° C ~ 40° C
Operating Humidity	20% ~ 85% (No Condensation)
Storage Temperature	-10° C ~ 50° C

Storage Humidity	10% ~ 90% (No Condensation)
Standard	HDMI Cable, Adapter, Pedestal, Quick Guide

Dimensions

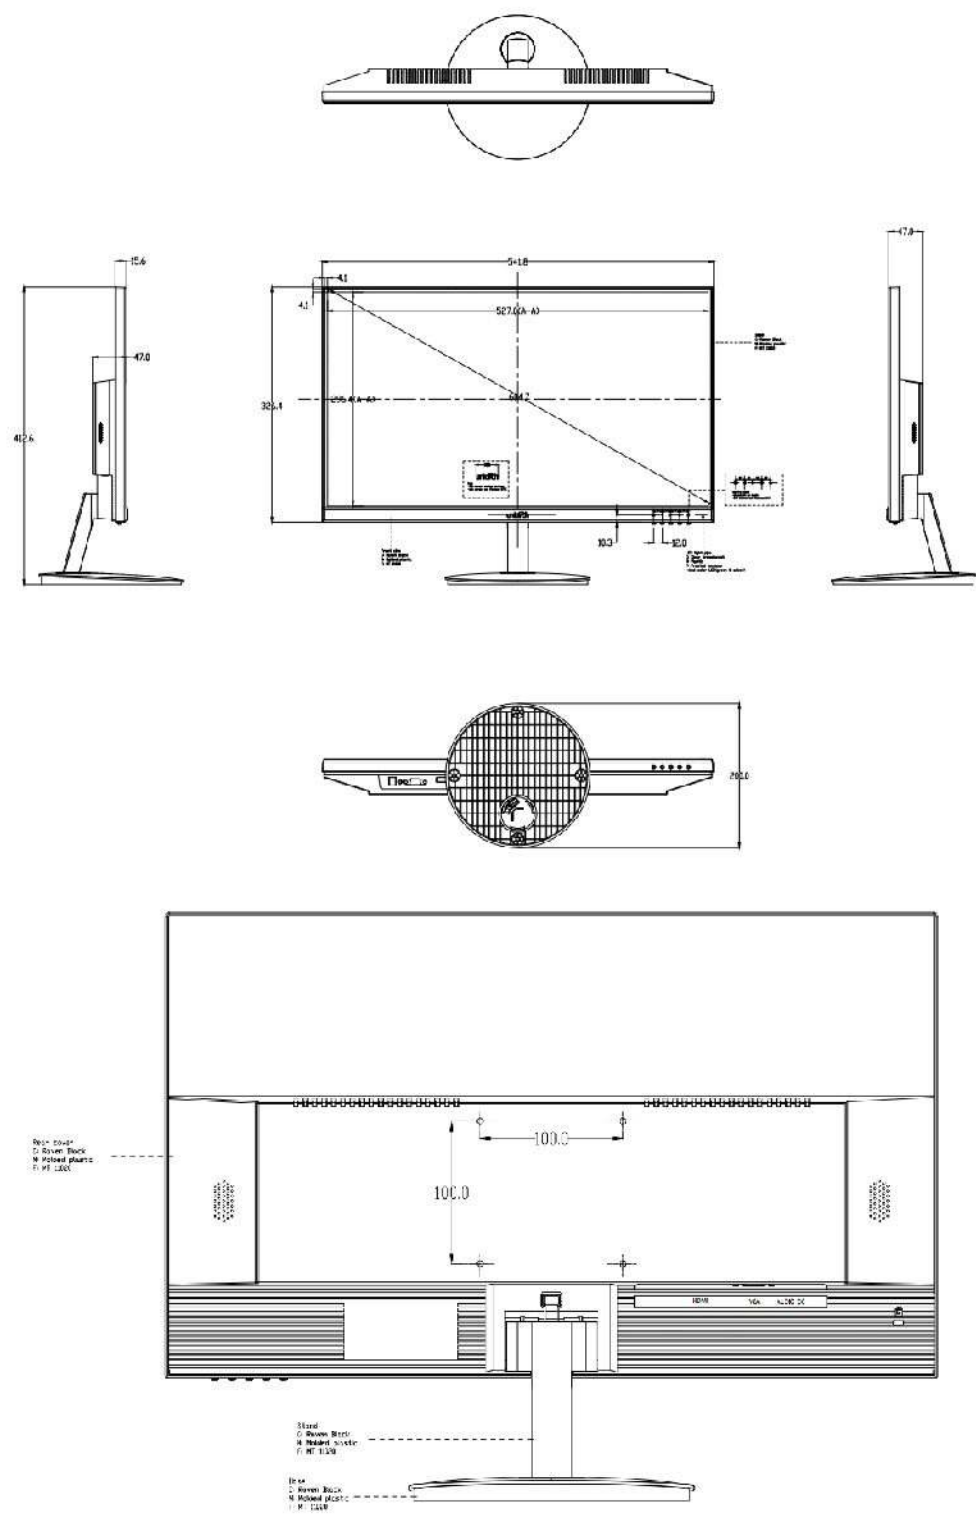

Interface

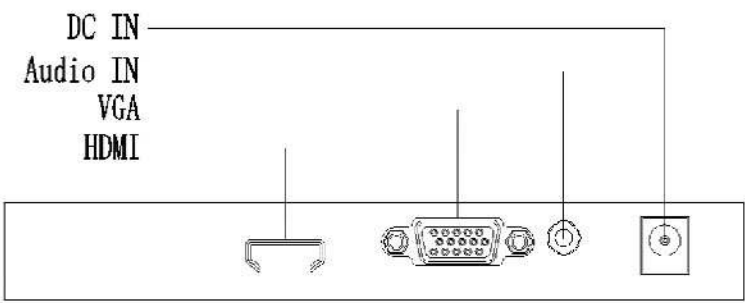

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023-2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.