

5MP Mini Fixed Bullet Network Camera

IPC2125LR3-PF40(60)M-D



Key Features



Optics

- Day/night functionality
- Smart IR, up to 30m (98ft) IR distance
- Optical glass window with higher light transmittance
- IR anti-reflection window to increase the infrared transmittance
- 2D/3D DNR (Digital Noise Reduction)

Compression

- Ultra 265, H.265, H.264, MJPEG
- ROI (Region of Interest)

Network

- ONVIF Conformance

Structure

- Wide temperature range: -30°C ~ 60°C (-22°F ~ 140°F)


- Wide voltage range of ±25%
- IP67
- 3-Axis

Specifications

		IPC2125LR3-PF40M-D			IPC2125LR3-PF60M-D		
Camera							
Sensor	1/2.7", 5.0 megapixel, progressive scan, CMOS						
Lens	4.0mm@F2.0				6.0mm@F2.0		
DORI Distance	Lens (mm)	Detect (m)	Observe (m)		Recognize (m)		Identify (m)
	4.0	60	24		12		6
	6.0	90	36		18		9
Angle of View (H)	79.7°				50.5°		
Angle of View (V)	51.8°				35.9°		
Angle of View (O)	98.0°				62.1°		
Adjustment angle	Pan: 0° ~ 360°		Tilt: 0° ~ 90°			Rotate: 0° ~ 360°	
Shutter	Auto/Manual, 1 ~ 1/100000s						
Minimum Illumination	Colour: 0.01Lux (F2.0, AGC ON) 0Lux with IR on						
Digital noise reduction	2D/3D DNR						
Day/Night	IR-cut filter with auto switch (ICR)						
S/N	>52dB						
IR Range	Up to 30m (98ft) IR range						
Wavelength	850nm						
IR On/Off Control	Auto/Manual						
Defog	Digital Defog						
WDR	DWDR						
Video							
Video Compression	Ultra 265, H.265, H.264, MJPEG						
H.264 code profile	Baseline profile, Main Profile						
Frame Rate	Main Stream: 5MP (2592*1944), Max 20fps; Sub Stream: 720P (1280×720), Max 20fps						
Video Bit Rate	128 Kbps~16 Mbps						
OSD	Up to 4 OSDs						
Privacy Mask	Up to 4 areas						
ROI	Up to 2 areas						
Motion Detection	Up to 4 areas						
Image							
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2						
Digital noise reduction	2D/3D DNR						
Smart IR	Support						
Flip	Normal/Vertical/Horizontal/180°						

Dewarping	NA
HLC	Supported
BLC	Supported
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, QoS
Compatible Integration	ONVIF (Profile S, Profile T), API
Client	EZStation EZView EZLive
Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below
	Plug-in free live view: Chorme 57.0+, Firefox 58.0+, Edge 16+, Safari 11+
Interface	
Network	10/100M Base-TX Ethernet
Certifications	
Certifications	CE: EN 60950-1 UL: UL60950-1 FCC: FCC Part 15
General	
Power	DC 12V±25%, PoE (IEEE 802.3af)
	Power consumption: Max 4W
Dimensions (L × W × H)	167.3 × 62.9 × 62.7mm (6.6" × 2.5" × 2.5")
Net Weight	0.45kg (0.99lb)
Material	Metal
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Storage Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Surge Protection	2KV
Ingress Protection	IP67
Reset Button	Supported

Dimensions

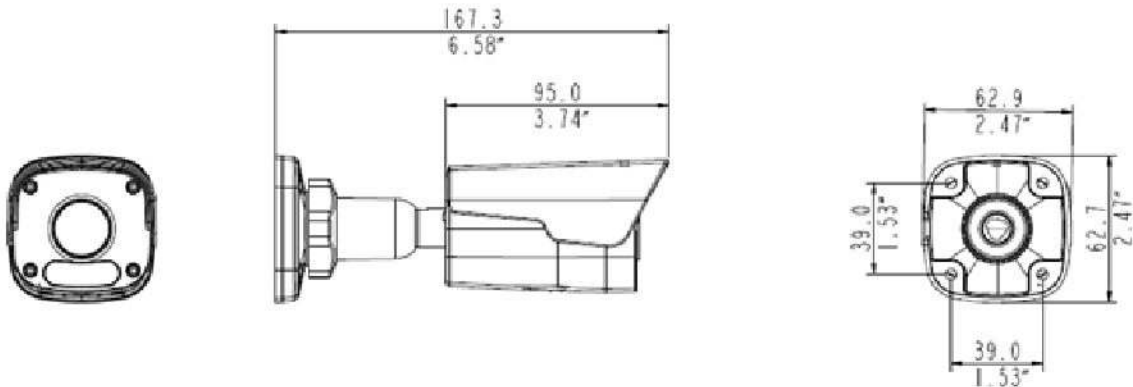

Accessories

TR-UP06-B-IN

TR-JB05-A-IN

TR-UP06-C-IN

TR-A01-IN



Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2020 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.