HIKVISION

DS-7608NI-M2/8P
8-ch 1U 8 PoE 8K NVR





- H.265+/H.265/H.264+/H.264 video formats
- Up to 8-ch IP camera inputs
- Up to 40 x 1080p@ 30fps decoding capacity
- Up to 128 Mbps incoming bandwidth
- Up to 8-ch IP speakers can be connected

*Professional and Reliability
*1、 H.265+ compression effectively reduces the storage space by up to 75%
*2、Dual-stream recording saves bandwidth
*3、Adopt stream over TLS encryption technology which provides more secure stream transmission service
*4、Support double verification for playback and downloading
*HD Video Output
*1、Provide independent HDMI and VGA outputs
*2、HDMI video output at up to 8K resolution
*Storage and Playback
*1、Up to 2 SATA interfaces for HDD connection
*2、8-ch synchronous playback
*Smart & POS Function
*1、Support multiple VCA (Video Content Analytics) events
*2、Configurable special camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR, and *people counting
*3、POS information overlay on live view and playback, and POS triggered recording and alarm
*Network & Ethernet Access
*1、8 independent PoE network interfaces
*2、1 self-adaptive 10/100/1000 Mbps Ethernet interface
*3、Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
*4、Smooth streaming technology
*5、Support web access without plug-in

www.hikvision.com

INFRONT TECHNOLOGIES

Supplied by INFRONT TECHNOLOGIES

Phone 1300 736 970

sales@infronttech.com.au · infronttech.com.au

For more information call or email — Australia-wide sales, technical support and warranty service.

▪ Specification

Video and Audio	
IP Video Input	8-ch Up to 32 MP resolution *: The NVR supports up to 8-ch 32/24/16 MP IP video inputs.
Incoming Bandwidth	128 Mbps
Outgoing Bandwidth	256 Mbps
HDMI Output	8K (7680 × 4320)/30Hz, 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz
VGA Output	1920 × 1080/60Hz
Video Output Mode	HDMI/VGA independent output
CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Audio Output	1-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ, using the audio input)
Decoding	
Dual-Stream Recording	Support
Decoding Format	H.265+/H.265/H.264+/H.264
Decoding Capability	2-ch@32 MP (30 fps); 3-ch@24 MP (30 fps); 5-ch@16MP (30 fps); 6-ch@12MP (30 fps);8-ch@8 MP (30 fps);
Synchronous Playback	8-ch
Recording Resolution	32 MP/24 MP/16MP/12 MP/8 MP/7 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF *: The NVR supports up to 8-ch 32/24/16 MP IP video inputs, all channels for less than 16 MP.
Stream Type	Video, Video & Audio
Audio Compression	G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2
Network	
Remote Connection	128
Network Protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS, ONVIF(Version 2.2), OTAP
Network Interface	1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Camera Access Protocol	ONVIF(Version 2.5), RTSP
PoE	
Interface	8, RJ-45 10/100 Mbps self-adaptive Ethernet interface
Power	≤ 120 W
Standard	IEEE 802.3 af/at
Auxiliary Interface	
SATA	2 SATA interfaces
Capacity	Up to 20 TB capacity for each disk
Alarm In/Out	4/1
USB Interface	Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0
General	
Power Supply	100 to 240 VAC, 50 to 60 Hz
Consumption	≤ 15 W (without HDD and PoE off)
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working Humidity	10% to 90%

INFRONT TECHNOLOGIES

Supplied by INFRONT TECHNOLOGIES

Phone 1300 736 970


sales@infronttech.com.au · infronttech.com.au

For more information call or email — Australia-wide sales, technical support and warranty service.

Dimension (W × D × H)	385 × 315× 52 mm (15.2" × 12.4" × 2.0")
Weight	≤ 3 kg (without HDD, 2.2 lb.)
Certification	
FCC	Part 15 Subpart B, ANSI C63.4-2014
CE	EN 55032:2015+A1:2020, ENIEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019, EN 50130-4:2011+A1:2014, EN 55035:2017+A11:2020
Cyber Security	
EN 303645	Support
Secure Boot	Support
Secure Component Verification SVC	Support
Password Protection	Support
IP & MAC Address Filtering	Support
HTTPS Encryption	Support
Live View & Playback Stream Encryption	Support : AES128
IEEE802.1X(EAP-TLS) Network Access Control	Support
Signed Firmware	Support
Others	Digest authentication: Support User access log : Support Centralized certificate management : Support Brute force delay protection : Support

▪ Physical Interface

No.	Description	No.	Description
1	Network interfaces with PoE function	7	VGA output
2	LAN interface	8	USB 3.0 interface
3	Audio out	9	CVBS video output
4	Audio in	10	GND
5	HDMI interface	11	100 to 240 VAC power supply
6	Alarm in and alarm out	12	Power switch

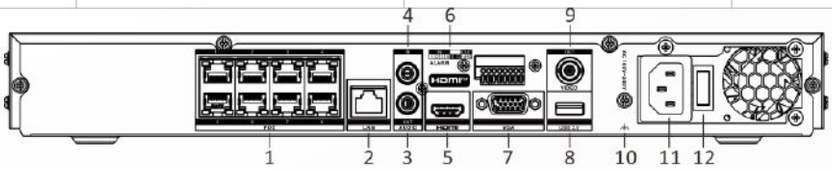

▪ Dimension


INFRONT TECHNOLOGIES

Supplied by INFRONT TECHNOLOGIES

Phone 1300 736 970

sales@infronttech.com.au · infronttech.com.au

For more information call or email — Australia-wide sales, technical support and warranty service.

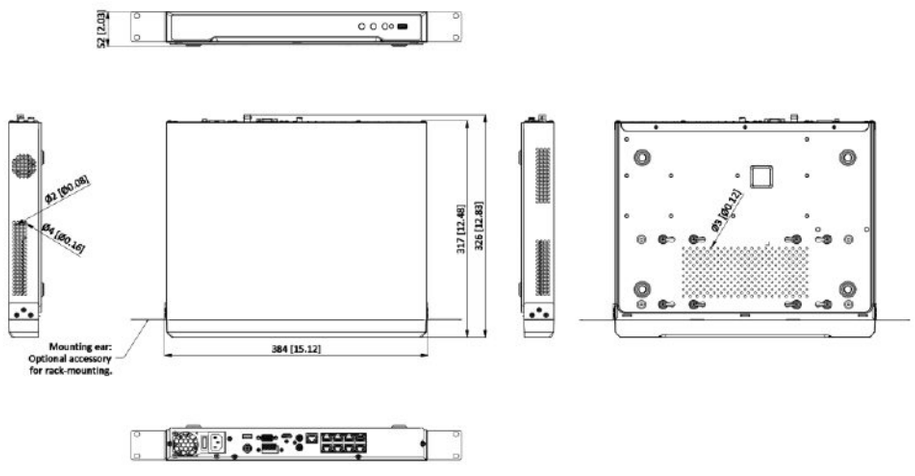

Unit:mm [inch]

SCALE	1:1

INFRONT TECHNOLOGIES

Supplied by INFRONT TECHNOLOGIES

Phone 1300 736 970

sales@infronttech.com.au · infronttech.com.au

For more information call or email — Australia-wide sales, technical support and warranty service.

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION

INFRONT TECHNOLOGIES

Supplied by INFRONT TECHNOLOGIES

Phone 1300 736 970

sales@infronttech.com.au · infronttech.com.au

For more information call or email — Australia-wide sales, technical support and warranty service.