DHI-KTA02

Video Intercom Kit





- 7" TFT screen
- Video intercom function: Unlock, voice call, video call, volume adjustment
- System Capacity: 2 door stations + 3 indoor monitors
- Multiple bell sounds
- Supports digital wide dynamic range (DWDR)



Technical Specification

VTH1020J

Button Type	Touch button
Basic	
Display	7.0" TFT
Screen Resolution	1024 × 600
Status Indicator	1 indicator light Green: Power on
Function	
Communication Mode	Analog
Performance	
Casing	PC + ABS
General	
Color	White
Power Supply	DC12V/1A
Power Adapter	Included
Installation	Surface mount
Certifications	CE/FCC
Accessory	Bracket (included) 5 m (16.40 ft) cable (included)
Dimensions	133.90 mm × 182.70 mm × 17.70 mm (5.27" × 7.19" × 0.70")
Operating Temperature	-10°C to +55°C (+14°F to +131°F)
Operating Humidity	10%RH–95%RH
Power Consumption	≤ 2W (standby) ≤ 5W (working)
Net Weight	0.25 kg (0.55 lb)
Gross Weight	0.48 kg (1.05 lb)

VTO1000J

Button Type	Mechanical
Basic	
Camera	1.3MP CMOS
Field of View	Horizontal: 70° Vertical: 40°
WDR	DWDR
Illuminator Type	Auto IR
Day/Night	ICR auto switch
Audio Input	1 channel to the microphone; pickup distance 0.5 m
Audio Output	1 channel to the speaker
Status Indicator	1 indicator light Green: Power on
Function	
Communication Mode	Analog
Unlock Mode	Local unlock
Performance	
Casing	PC + ABS
Port	
Exit Button	1
Door Status Detection	1
General	
Color	Silver
Power Supply	Powered by indoor monitor
Installation	Surface mount

INFRONT TECHNOLOGIES

Supplied by INFRONT TECHNOLOGIES

Phone 1300 736 970

sales@infronttech.com.au · infronttech.com.au

For more information call or email — Australia-wide sales, technical support and warranty service.

Certifications	CE/FCC
Accessory	Rain cover (included) 5 m cable (included in kit)
Dimensions	131.45 mm × 46.00 mm × 33.80 mm (5.18" × 1.81" × 1.33")
Protection Grade	IP66 (Apply silicon sealant to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
Operating Temperature	–30°C to +60°C (–22°F to +140°F)
Operating Humidity	10%RH–95%RH
Power Consumption	≤ 1W (standby) ≤ 3W (working)
Net Weight	0.18 kg (0.40 lb)
Gross Weight	0.38 kg (0.84 lb)

Application

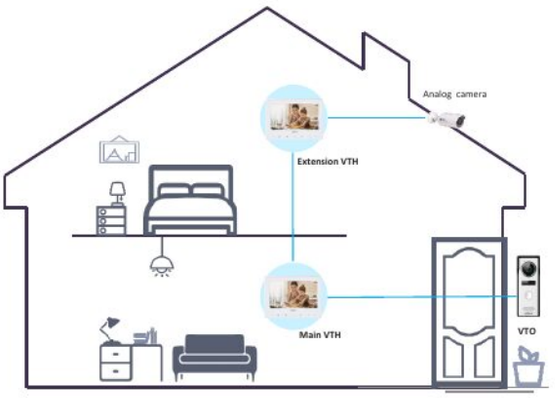

Ordering Information

Type	Model	Description
Video Intercom Kit	DHI-KTA02	Video Intercom Kit
Inclined Bracket	VTM22A	Horizontally Inclined Bracket
Inclined Bracket	VTM23A	Vertically Inclined Bracket

Dimensions (mm[inch])

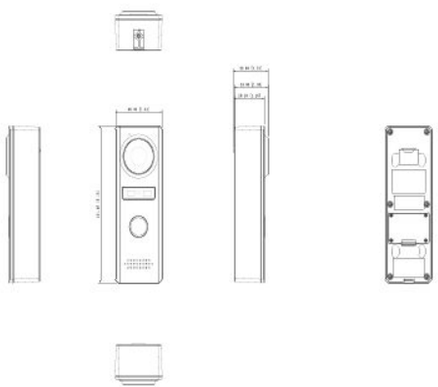

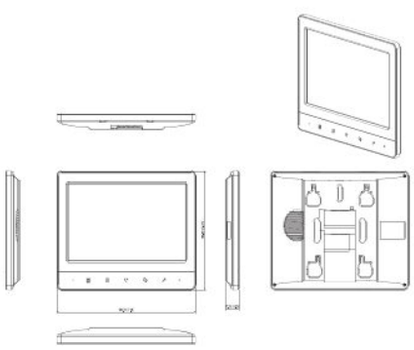

Rev 002.000 © 2024 Dahua. All rights reserved. Design and specifications are subject to change without notice.
The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product.

INFRONT TECHNOLOGIES

Supplied by INFRONT TECHNOLOGIES

Phone 1300 736 970

sales@infronttech.com.au · infronttech.com.au

For more information call or email — Australia-wide sales, technical support and warranty service.