PFM820

UTC Controller



Features

- Support different formats (HDCVI/AHD/HDTVI/CVBS) switch, which is to satisfy the requirements of different storage device environments for clients;
- Various format indicator lights, which makes it convenient for users to check the current format status and prompt if the format switch is successful;
- Support OSD control and the electric zoom function control in CVBS mode.

INFRONT TECHNOLOGIES

Supplied by INFRONT TECHNOLOGIES

Phone 1300 736 970

sales@infronttech.com.au · infronttech.com.au

For more information call or email — Australia-wide sales, technical support and warranty service.


Technical Specifications

Model	PFM820
Features	
Formats	HDCVI/AHD/HDTVI/CVBS
Power Consumption	0.3W
Power Supply	AAA battery*2
Indicator Lights	Prompt current format
Applicable Pixel	2MP and below
Physical Properties	
Dimension(LxWxH)	Body: 90mmx41mmx21mm (3.54"x1.61"x0.83") Length: 560mm(22.05")
Outer Shell	PC&ABS
Color	White
N.W.	48g(0.11lb)
Environmental	
Operating Temperature	0℃~+40℃(+32℉~+104℉)
Humidity	0~95% (non-condensing)
Certification	
Certification	CE

Order Information

Type	Part Number	Description
HDCVI Accessories	PFM820	UTC controller

Dimensions (mm/inch)

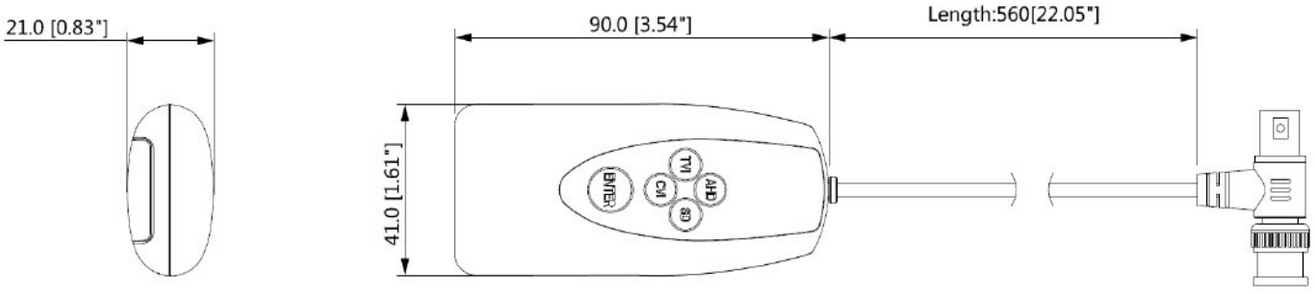

INFRONT TECHNOLOGIES

Supplied by INFRONT TECHNOLOGIES

Phone 1300 736 970

sales@infronttech.com.au · infronttech.com.au

For more information call or email — Australia-wide sales, technical support and warranty service.

Application



Package Information

- UTC controller *1
- Application manual *1

Rev 001.001

© 2018 Dahua. All rights reserved. Design and specifications are subject to change without notice.

www.dahuasecurity.com

INFRONT TECHNOLOGIES

Supplied by INFRONT TECHNOLOGIES

Phone 1300 736 970

sales@infronttech.com.au · infronttech.com.au

For more information call or email — Australia-wide sales, technical support and warranty service.