
SR-PSU-12v2A-OEM

12V 2A plug-pack power supply, centre positive 2.1 mm plug, suits Swann 4 and 8-channel DVRs

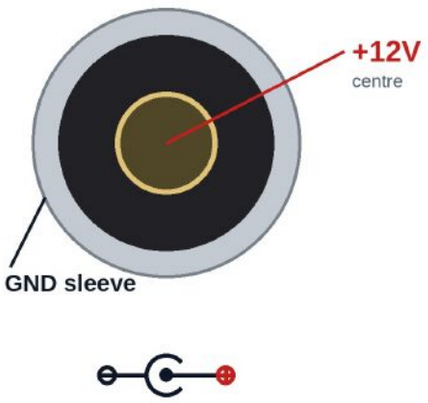

12V DC, centre positive

Looking into the end of the plug

Centre pin
+12V (positive)

Outer sleeve
GND (0V, negative)

Plug
2.1 mm inside, 5.5 mm outside

Output
12V DC, 2A max

Only connect it to equipment that takes 12V DC on a centre positive plug.

Output	12V DC, 2A
Input	100-240V AC, 50/60Hz
DC plug	Barrel plug, 2.1 mm inside, 5.5 mm outside; centre +12V, outer sleeve GND (centre positive)
Mains	Australian plug-pack: plugs straight into a power point
Approval	RCM mark on the rating label
Unit pictured	I.T.E. power supply model CY-122000, Efficiency Level V; the model number on the unit supplied may differ, the 12V 2A centre positive rating is the same
Suits	Swann 4 and 8-channel DVRs whose original adaptor reads 12V 2A, centre positive
Not enough for	DVRs whose adaptor reads 12V 3A or more (many 16-channel DVRs)
Not for	Swann NVRs (48V) or equipment with the opposite polarity
Meter check	DC volts, red probe inside the plug, black probe on the outer sleeve: about +12V

Only connect this supply to equipment that takes 12V DC, 2A or less, centre positive, on a 2.1 mm plug.

Indoor use. Do not open the case. Cutting or rewiring the DC lead voids the warranty.

Figures from the rating label of the unit pictured. No manufacturer datasheet is published for this supply. Questions: 1300 736 970, sales@infronttech.com.au.

INFRONT TECHNOLOGIES

Supplied by INFRONT TECHNOLOGIES

Phone 1300 736 970

sales@infronttech.com.au · infronttech.com.au

For more information call or email — Australia-wide sales, technical support and warranty service.